


FMB120

GNSS/GSM/BLUETOOTH TRACKER WITH INTERNAL GNSS/GSM ANTENNAS

Teltonika FMB120 is ADVANCED tracker with internal GNSS, GSM antennas, Bluetooth connectivity and backup battery. FMB120 is designed for light vehicles tracking but is also suitable for advanced applications like logistics, delivery services, utility transport and more. It is excellent for refrigerated transport, because it has extended input/output set and 1-wire interface for temperature monitoring. With Teltonika CAN adapters, FMB120 can be even used in agriculture or construction & mining.



Digital Input/Output for remote monitoring and control




Allows device to work without external power source



1-Wire® interface to monitor temperature data and RFID/iButton tags



Bluetooth for external devices and Low Energy sensors

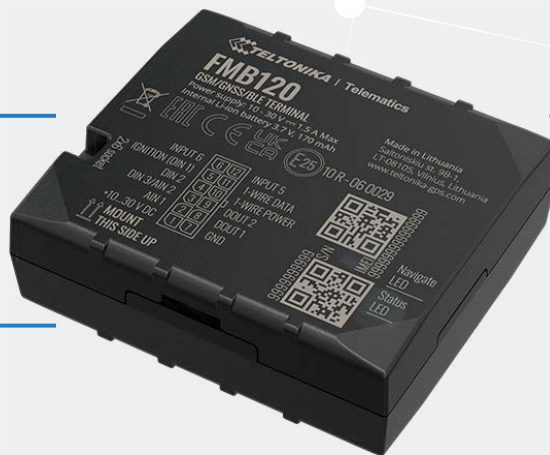

USE CASES



LIGHT VEHICLES



HEAVY DUTY TRANSPORT



TRAILER TRACKING



REFRIGERATED TRANSPORT



INTERNATIONAL LOGISTICS



CAR SHARING



Module

Name	Teltonika TM2500
Technology	GSM/GPRS/GNSS/BLUETOOTH

GNSS

GNSS	GPS, GLONASS, GALILEO, BEIDOU, SBAS, QZSS, DGPS, AGPS
Receiver	33 channel
Tracking sensitivity	-165 dBm
Position accuracy	< 2.5 CEP
Velocity accuracy	< 0.1m/s (within +/- 15% error)
Hot start	< 1 s
Warm start	< 25 s
Cold start	< 35 s

Cellular

Technology	GSM
2G bands	Quad-band 850 / 900 / 1800 / 1900 MHz
Data transfer	GPRS Multi-Slot Class 12 (up to 240 kbps), GPRS Mobile Station Class B
Data support	SMS (text/data)

Power

Input voltage range	10 - 30 V DC with overvoltage protection
Back-up battery	170 mAh Li-Ion battery 3.7 V (0.63 Wh)

Power Consumption

At 12V < 6mA	Ultra Deep Sleep
At 12V < 8mA	Deep Sleep
At 12V < 11mA	Online Deep Sleep
At 12V < 20mA	GPS Sleep
At 12V < 35 mA	Nominal with no load

Bluetooth

Specification	4.0 + LE
Supported peripherals	Temperature and Humidity sensor, Headset, OBDII dongle, Inateck Barcode Scanner, Universal BLE sensors support

Physical specification

Dimensions	65 x 56.6 x 20.6 mm (L x W x H)
Weight	55 g

Interface

Digital Inputs	3
Digital Outputs	2
Analog Inputs	2
CAN Adapter inputs	1
1-Wire	1
GNSS antenna	Internal High Gain
Cellular antenna	Internal High Gain
USB	2.0 Micro-USB
LED indication	2 status LED lights
SIM	Micro-SIM + eSIM
Memory	128MB internal flash memory

Operating environment

Operating temperature (without battery)	-40 °C to +85 °C
Storage temperature (without battery)	-40 °C to +85 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP41
Battery charge temperature	-0 °C to +45 °C
Battery discharge temperature	-20 °C to +60 °C
Battery storage temperature	-20 °C to +45 °C for 1 month -20 °C to +35 °C for 6 months

Features

Sensors	Accelerometer
Scenarios	Green Driving, Over Speeding detection, Jamming detection, GNSS Fuel Counter, DOUT Control Via Call, Excessive Idling detection, Immobilizer, iButton Read Notification, Unplug detection, Towing detection, Crash detection, Auto Geofence, Manual Geofence, Trip
Sleep modes	GPS Sleep, Online Deep Sleep, Deep Sleep, Ultra Deep Sleep
Configuration and firmware update	FOTA Web, FOTA, Teltonika Configurator (USB, Bluetooth), FMBT mobile application (Configuration)
SMS	Configuration, Events, DOUT control, Debug
GPRS commands	Configuration, DOUT control, Debug
Time Synchronization	GPS, NITZ, NTP
Fuel monitoring	LLS (Analog), LV-CAN200, ALL-CAN300, CAN-CONTROL, OBDII dongle
Ignition detection	Digital Input 1, Accelerometer, External Power Voltage, Engine RPM (CAN Adapters, OBDII dongle)

Certification & Approvals

Regulatory	CE/RED, E-Mark, EAC, RoHS, REACH
------------	----------------------------------

